



beyond standard
solutions

PAXModular

NC02-CTRL02


Sittig Technologies GmbH

Goldgewann 4
D-65931 Frankfurt / Main
Germany

Phone:
+49 / 69 / 37 00 02 - 0

Web:
www.sittig.de

E-Mail:
info@sittig.de

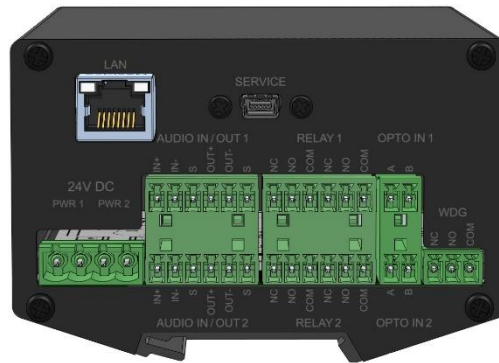

Technical details

Function	PCM Unicast or Multicast Audio streaming via Ethernet
Voltage	Redundant 24V / DC (18-36V) and/or Poe
Max. power input	500mA
2 Optocoupler inputs	Activated by 0V or +24V signal Maximum capacity: 30V / 50mA / 100mW
2 relay outputs	Two changeover contacts each
2 audio inputs	Electrical symmetric mono
2 audio outputs	Electrical symmetric mono
Communication	Network 100Mbit LAN Gbit, TCP/IP, UDP/RTP
Dimensions	Case with screw lug and optional top-hat rail bracket height: 66mm width: 130mm length: 140mm
Connection	Screw terminals, RM 3,81
Network connection	RJ45
Monitoring	Voltage and electronic monitoring via watchdog
Signalling	Voltage, audio and error by lamps (LED) on the front panel
Reports	In case of errors, immediate error message to the central control software or a network management system via TCP/IP and/or SNMP